




# NEW BLUETOOTH SMART LOCK

## PROGRAMMING QUICK GUIDE

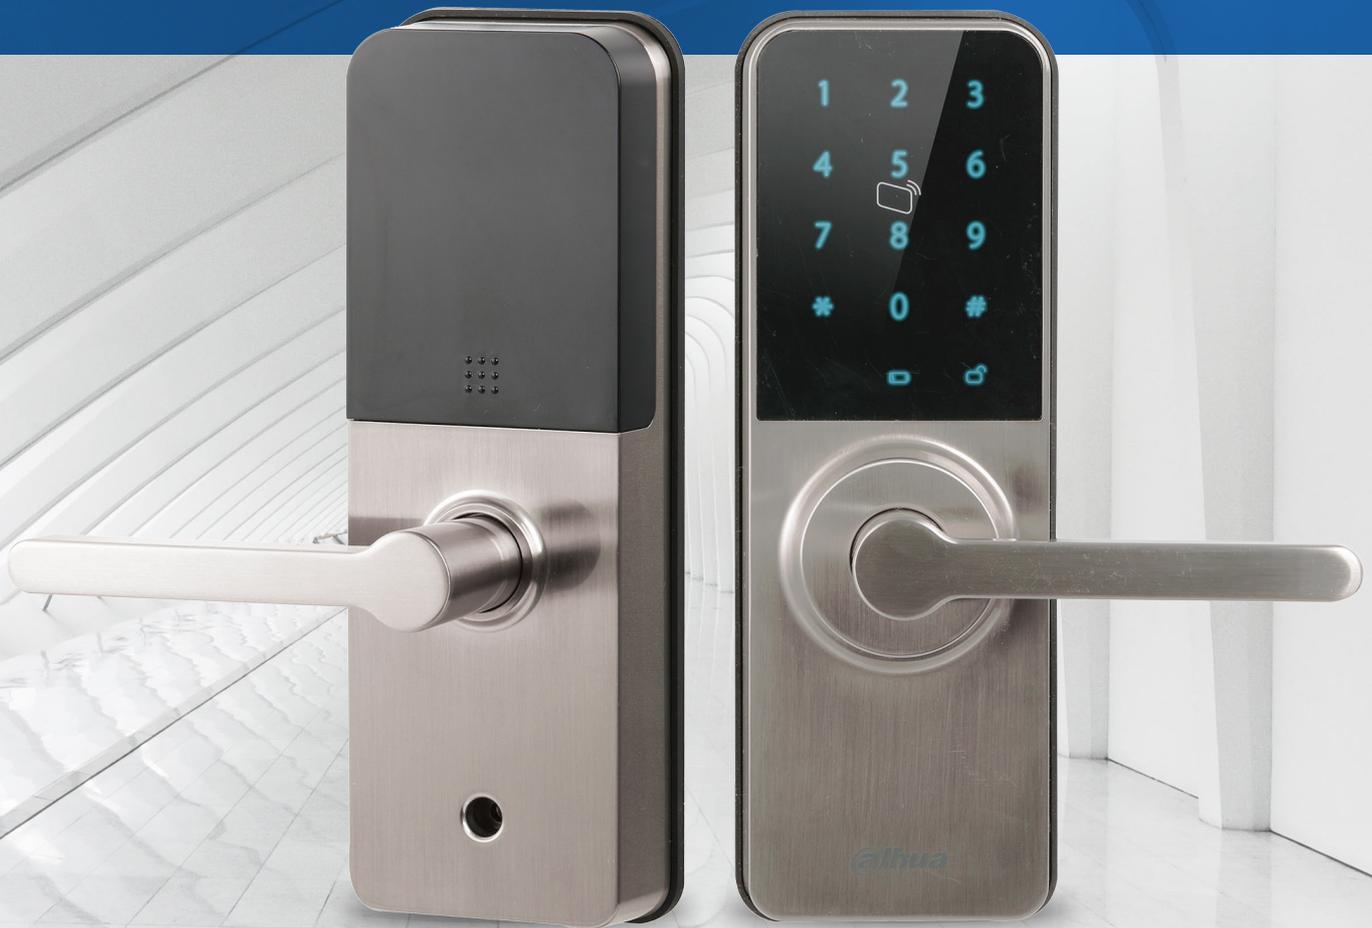

### FEATURES:

- 3 Modes, Pin Code, Mifare Credential, BLE
- Can store 50 pins, 50 cards and 8 BLE devices
- Event History Log in App
- Passage mode
- Privacy mode (allows operation only by admin code)
- Pin code privacy feature
- Wrong attempt lockout feature (3 attempts 3 mins)
- Emergency 9v battery connection
- Key override
- Field changeable handing
- 60mm- 70mm Adjustable tubular latch
- 4 x AA Lithium Batteries (not supplied)

**Silver Finish** DHASL2101S

**Black Finish** DHASL2101B

### LOCK SETUP

- After installation and powering up lock for the first time you must change the default admin code from 123456
- Press the enrolment button under battery cover
- 1,2,3,4,5,6 #
- Enter new admin code (6 to 12 digits) followed by #
- Repeat new admin code followed by #
- Hit enrolment button to end program mode or wait for timeout

enrolment button



### PROGRAM USER PIN CODE

- Press enrolment button
- Enter admin code then #
- Press 1 #
- Press 1
- Enter user code (6 to 12 digits) #
- Repeat user code and #
- Press 1 to add another user repeating this step
- Press enrolment button or let timeout to finish.

### PROGRAM USER CREDENTIAL

- Press enrolment button
- Enter admin code then #
- Press 2 #
- Present Mifare card / fob
- Press # to accept
- Press 2 to add another credential repeating this step
- Press enrolment button or let timeout to finish.




### ADD BLE DEVICE

Download the Smart Lock BT app  
 \*Gesture enable places extra layer of security on App via unlock pattern (recommended)

<https://play.google.com/store/apps/details?id=com.dahua.bluetoothunlock&hl=en>  
<https://apps.apple.com/au/app/smartlockbt/id1044976097>


- Press Add door lock on App
- Press enrolment button
- Enter admin code then #
- Press 4 on lock keypad
- Click next on the App
- Press 4 to add another device
- Press enrolment button or let lock timeout

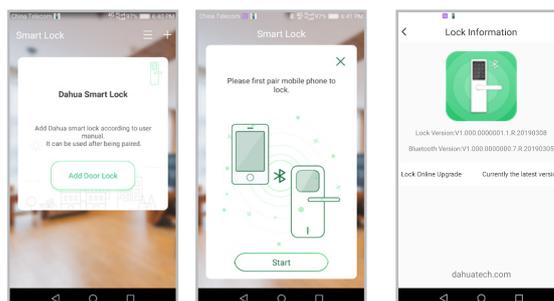



## USING THE SMART LOCK APP

\*Note when the ring around the padlock image is green you have BLE connection with lock.

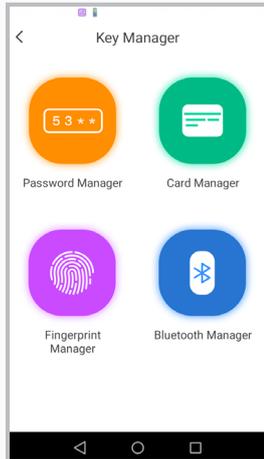

### Share

Issues a one-time pin code via text or email to a visitor (unlimited).

### Key Manager

Configure lock settings through the App.

### Card Manager

Add cards through the App and give user name to cards. Individually delete cards.

### Lock Manager

Name your lock, View Unlock Records = Event History.

### Password Manger

Add pin codes through the App and give user names to codes. Individually delete pin codes.

### Bluetooth Manager

Name registered BLE devices and individually delete devices.

\*Changes will take effect once returned to home screen



### Deleting Users Through Lock

\*Note individual user deletion can only be done through App.

#### Pin Codes

Press enrolment button  
Enter admin code then #  
Press \* 1

#### Credentials

Press enrolment button  
Enter admin code then #  
Press \* 2

#### BLE Devices

Press enrolment button  
Enter admin code then #  
Press \* 4



### Privacy Mode

To enter privacy mode where only Admin Code will operate lock  
Press and hold \* until you hear beep. Enter admin code then #.  
To remove privacy mode repeat the above step.



### Passage Mode

To put the lock in passage mode press and # until you hear beep.  
Enter admin code then #.  
To take out of passage mode repeat the above step.